



Bkdfkbbofkd AoU tfkd

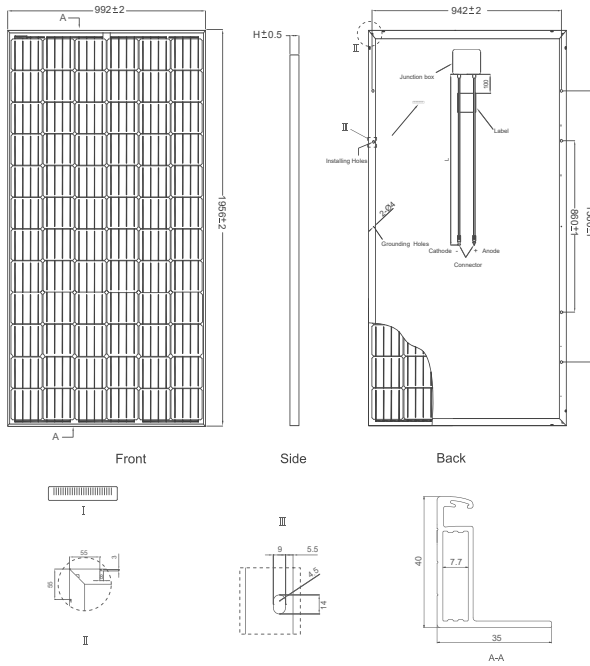

(Two boxes=One pallet)
 26pcs/box , 52pcs/pallet, 624 pcs/40'HQ Container

Electrical Performance Temperature Dependence

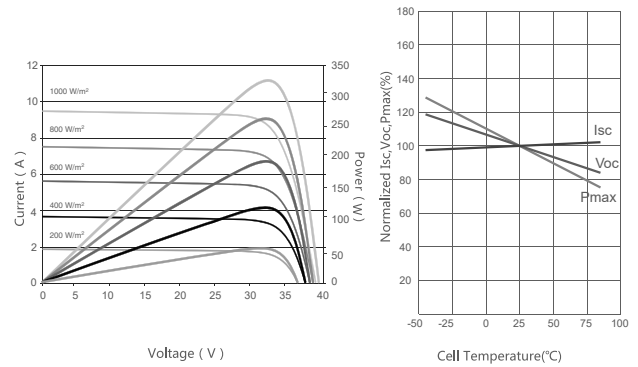

JbWeU kfWU i 7 eU oU Wh bofph fWp

Cell Type	Mono-crystalline PERC 156×156mm (6 inch)
No. of cells	72 (6×12)
Dimensions	1956×992×40mm (77.01×39.05×1.57 inch)
Weight	26.5 kg (58.4 lbs)
Front Glass	4.0mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67 Rated
Output Cables	TÜV 1×4.0mm², Length:900mm or Customized Length

SPECIFICATIONS

Module Type	JKM340M-72-V		JKM345M-72-V		JKM350M-72-V		JKM355M-72-V		JKM360M-72-V	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	340Wp	254Wp	345Wp	258Wp	350Wp	262Wp	355Wp	266Wp	360Wp	270Wp
Maximum Power Voltage (Vmp)	38.7V	36.8V	38.9V	37.0V	39.1V	37.2V	39.3V	37.5V	39.5V	37.7V
Maximum Power Current (Imp)	8.79A	6.89A	8.87A	6.98A	8.94A	7.05A	9.04A	7.09A	9.12A	7.17A
Open-circuit Voltage (Voc)	47.1V	45.5V	47.3V	45.8V	47.5V	46.0V	47.8V	46.2V	48.0V	46.5V
Short-circuit Current (Isc)	9.24A	7.33A	9.31A	7.38A	9.38A	7.46A	9.45A	7.54A	9.51A	7.61A
Module Efficiency STC (%)	17.52%		17.78%		18.01%		18.31%		18.57%	
Operating Temperature (°C)	-40 ~+85									
Maximum system voltage	1500VDC (IEC)									
Maximum series fuse rating	15A									
Power tolerance	0~+3%									
Temperature coefficients of Pmax	-0.39%/°C									
Temperature coefficients of Voc	-0.29%/°C									
Temperature coefficients of Isc	0.05%/°C									
Nominal operating cell temperature (NOCT)	45±2									

*STC: Irradiance 1000W/m² Cell Temperature 25°C AM= 1.5

NOCT: Irradiance 800W/m² Ambient Temperature 20°C AM= 1.5 Wind Speed 1m/s

* Power measurement tolerance: ± 3%